

**PRV****BEST AVAILABLE COPY**PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen

REC'D 24 FEB 2004

WIPO

PCT

**Intyg  
Certificate**

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.



(71) Sökande                      Attana AB, Stockholm SE  
Applicant (s)

(21) Patentansökningsnummer      0300375-3  
Patent application number

(86) Ingivningsdatum                      2003-02-12  
Date of filing

Stockholm, 2004-02-17

För Patent- och registreringsverket  
For the Patent- and Registration Office

*Marita Öun*  
Marita Öun

Avgift  
Fee

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

## Piezoelectric resonator

### Technical field

- 5 The present invention pertains to a piezoelectric resonator, a flow cell comprising a piezoelectric resonator and sensor arrangement comprising a piezoelectric resonator.

### Background

- 10 A Quartz Crystal Microbalance (QCM) sensor arrangement utilizes the piezoelectric effect of a quartz crystal. In such a system a quartz crystal that is placed between two electrodes, which are connected to an AC-potential, begins to oscillate if the frequency of the AC-potential is close to the resonance frequency of the oscillation mode for the quartz crystal.

15

- A typical QCM sensor arrangement comprises a piezoelectric sensor unit, a sample insertion unit, a frequency counter, and signal presentation equipment and buffer and waste containers. A sample, which can contain any chemical substance of interest that can interact with the electrode of the sensor, is introduced into the sensor unit by the
- 20 sample insertion unit. The sensor unit contains a piezoelectric resonator, a sensor chamber, flow channels to and from the chamber and an oscillating circuit. The sample induces an interaction with the piezoelectric sensor surface, which can in turn be observed by monitoring the oscillating characteristics of the crystal plate, e.g. by measuring changes in the piezoelectric resonator frequency. The resonator utilised by the
- 25 sensor unit includes a crystal plate, which is provided with electric contact areas for an electrode and a counter electrode on its surface, which electrodes are connectable to a signal source (e.g. an alternating voltage source) as well as to a measurement device. For measuring, one side of the piezoelectric crystal plate is brought into contact with the sample to be examined. The crystal responds to the substance to be detected or to a
- 30 change in the physical properties of the sample by an increase of associated mass on

the electrode surface or a loss of associated mass on the electrode (i.e. a change in the mass that oscillates together with the crystal). Such a change in associated mass leads to an alteration of the resonance frequency and/or oscillation amplitude of the resonator.

5

Piezoelectric sensors can be used for analysis of the viscosity of a liquid sample and are particularly suitable for studying chemical and biochemical interactions.

10

The crystal plates utilised by piezoelectric resonators are usually small oscillator quartz crystal plates. An example of such a small oscillator quartz crystal plate is disclosed in GB 2 154 058 A, which describes a circular crystal plate provided with circular electrodes for use in e.g. telecommunication apparatuses. This type of resonator has also been used in QCM sensor arrangements for analysis of fluid samples. In QCM sensor arrangements the resonator is arranged in a sensing chamber in which the sample is brought into contact with one of the electrodes (sensing electrode) of the resonator. Such a sensor arrangement is disclosed in EP 0 453 820 A2. The sensing chamber is often designed as a flow-through-cell, (see e.g. US 6 196 059) such that the sample flow has its inlet at one end of the chamber and its outlet at another, whereby the sample can be lead though the chamber and meanwhile interact with the sensing electrode during its passage through the chamber. There is a continuously increasing demand of QCM sensor arrangements that have an improved sensitivity.

20

The object of the present invention is to provide a resonator and a flow cell for use in a sensor arrangement that has an improved sensitivity.

25

### Summary of the invention

The object of the present invention is achieved by a resonator as described in the claims.

30

The present invention thus relates to a piezoelectric resonator for use in a sensor arrangement for detecting or measuring an analyte in a medium. The resonator comprises a quartz crystal plate having a first crystal surface and a second crystal surface, said first crystal surface being provided with a first electrode and said second crystal surface being provided with a second electrode characterised in that the first electrode has a surface area of less than  $15 \text{ mm}^2$ . This resonator has an improved sensitivity.

In one embodiment, the first electrode of the resonator has a surface area of less than  $10 \text{ mm}^2$ . In another embodiment the surface area of the first electrode is at least  $0.05 \text{ mm}^2$ , preferably  $1-5 \text{ mm}^2$ . The resonator of these embodiments has an even more improved sensitivity.

In a preferred embodiment the first electrode surface has the shape of a rectangle, having a first side and a second side. This surface shape achieves a more immediate response to the substance to be detected. The rectangular shape of the electrode also renders it possible to achieve improved flow and sensor characteristics when used in a flow cell. The first side of the rectangle is preferably at least 0,1-10 times the second side.

Preferably, the first crystal surface of the resonator is provided with a first contacting area that is connected to the first electrode and the second crystal surface is provided with a second contacting area connected to the second electrode. The contacting areas facilitate the registration of the alterations in resonance frequency of the resonator. In the case a rectangular electrode is used, the first contacting area is preferably connected to the second side of the first electrode. Thereby the contacting area will not disturb the flow of fluid past the electrode.

In one embodiment the first and second surfaces of the quartz crystal are flat. A crystal with flat surfaces is easy to manufacture and therefore cheap to manufacture.

In another embodiment the quartz crystal is an inverted mesa, i.e. the crystal has at least a first recess on its first side in which the first electrode is provided. An inverted mesa has improved oscillating properties in comparison to other crystals and therefore improves the sensitivity of the QCM sensor arrangement. The first recess has a wall and a bottom surface. The area of the bottom surface is larger than the first electrode and the first electrode is arranged in the recess such that the part of the bottom surface that is not covered by the electrode surrounds the electrode on all sides. This distance between the electrode and the walls of the recess ensures that dampening of the crystal oscillation is avoided, whereby the sensitivity is improved. The shortest distance from the electrode edge to the recess walls is preferably at least 0.01 mm.

The present invention also relates to a piezoelectric resonator for use in a sensor arrangement for detecting or measuring an analyte in a medium, which resonator comprises a quartz crystal plate having a first crystal surface and a second crystal surface, said first crystal surface being provided with a first electrode and said second crystal surface being provided with a second electrode, characterised in that the first electrode has a surface that has the shape of a rectangle. This resonator enables a more immediate response to the substance to be detected. The rectangular shape of the electrode also renders it possible to achieve improved flow and sensor characteristics when used in a flow cell. The rectangle has a first side and a second side and the first side is at least 0,1-10 times the second side.

The present invention also relates to a flow cell for use in an apparatus for detecting or measuring an analyte in a medium, comprising walls forming a sensing chamber together with a resonator as described above, and inlet and outlet openings for leading a fluid through the sensing chamber, characterised in that a part of the resonator constitutes one of the walls of the sensing chamber and is arranged such that the first electrode is situated inside the sensing chamber. This flow cell enhances the flow characteristics of a fluid sample passing through the sensing chamber. The cross sectional area of the sensing chamber perpendicular to the flow direction is advantageously less

than 2,5 times the cross sectional area of the inlet and outlet openings, and is most preferably the same as the cross sectional area of the inlet and outlet openings.

In a preferred embodiment the flow cell comprises a flow cell element that includes an outwardly open recess, having a bottom surface and walls, whereby said bottom and walls constitute the walls of the sensing chamber not provided by the resonator, and wherein the resonator is a replaceable part, which is held against the flow cell element by a pressing force so as to cover the recess and thus form the flow cell. This is advantageous since the flow cell only comprises a few parts, which are easy to assemble, and the resonator is easily detachable, which facilitates the replacement of a used resonator with a fresh one. The flow cell element preferably comprises a contact surface, against which the resonator is to be held, which is plane-parallel to the bottom of the recess and which encircles the recess, and wherein the recess has a geometrical shape that corresponds to the geometry of the first electrode. The surface ensures the liquid tight contact between the flow cell element and the crystal surface and the geometrical shape of the recess further improves the flow characteristics in the sensing chamber. In another embodiment the flow cell comprises a flow cell element that includes an outwardly open recess, having a bottom surface and walls, whereby said bottom and walls constitute the walls of the sensing chamber not provided by the resonator, and wherein the resonator is attached to the flow cell element by an adhesive so as to cover the recess and thus form the flow cell. This flow cell is very easy to handle, since the whole flow cell is a pre-assembled replaceable part that does not require any skill in inserting into the QCM sensor arrangement. In both the above embodiments the shortest distance from the electrode edge to the recess walls preferably is at least 0.01 mm, whereby it is assured that the flow cell element does not disturb the oscillation of the resonator.

The present invention also relates to a sensor arrangement for detecting or measuring an analyte in a medium, characterised in that it comprises a flow cell as described above. This arrangement has an improved sensitivity.

### Brief description of the drawings

Figure 1 shows a block diagram of a typical piezoelectric QCM sensor arrangement

5 Figure 2 shows a cross-sectional view along the line II-II in Fig 3a, of a piezoelectric resonator of the present invention.

Figure 3a shows an oblique view of a piezoelectric resonator of one embodiment of the present invention, from the sensing electrode side, i.e. the side, which is to be in contact with the sample.

10 Figure 3b shows an oblique view of the piezoelectric resonator in Fig. 3a, from the counter electrode side.

Figure 4 shows an oblique view of a piezoelectric resonator of another embodiment of the present invention, from the sensing electrode side.

15 Figure 5 shows an oblique cross-sectional view of a piezoelectric resonator of yet another embodiment of the present invention.

Figure 6 shows a cross-sectional view of a flow cell in which a piezoelectric resonator of the present invention is arranged.

Figure 7 shows an oblique cross-sectional exploded view of a flow cell in which comprises a piezoelectric resonator of the present invention and a flow cell element.

20

### Description of the embodiments

25 The piezoelectric resonator of the present invention is intended for use in a sensor arrangement of a QCM system, such as the one schematically shown in Fig. 1, for sensing chemicals and/or chemical reactions in liquids or other fluid media. Such a QCM sensor system comprises a computer (PC) 1 for controlling and presenting data, a frequency counter 2, a sample insertion unit 3, a sensor arrangement 4, a buffer solution container 5 and a waste container 6. In use, a liquid or gaseous base flow is lead from the buffer solution container 5, through the sensor arrangement and across the resona-  
30

tor, which is arranged in a sensing chamber in the sensor arrangement 4 and is caused to oscillate at its resonance frequency, e.g. by an alternating voltage source. The sample, which may be liquid or gaseous, is injected into the sensor arrangement 4 and forced forward to the sensing chamber by means of the base flow. The sample thus enters the sensing chamber as a sample plug. As the sample passes the piezoelectric resonator the analyte in the sample interacts with the electrode provided on the resonator and thereby causes a change in the resonance frequency of the resonator. The frequency change is registered by means of the frequency counter 2. The sample is then lead to a waste container.

10

A typical resonator used in QCM sensor arrangements comprises a circular quartz crystal, which is provided with electrodes on both sides. The resonator has a sandwich structure with the quartz crystal in the middle. The thickness of the quartz crystal is given by the desired resonance frequency, or vice versa. On both sides of the crystal there might be an adhesive layer of for instance titanium, chromium, nickel, aluminium or alloys thereof. On top of the optional adhesive layer an electrode is arranged. The electrode is a electrically conductive material, the actual material chosen depends on the application but is normally gold, silver, titanium, chromium, nickel, aluminium, platinum, palladium or a metal alloy. The electrode materials may be different on each side of the crystal. The electrodes have traditionally been circular, with a diameter that is smaller than the diameter of the quartz crystal.

20

The substance to be detected normally binds to the electrode surface. In some applications the electrode that is to be exposed to the sample is provided with a specific surface coating, with which the substance to be detected then interacts. Such a surface coating has specific binding sites to which the substance to be detected binds. In some cases the substance to be detected may instead interact with the surface coating so as to remove material from the surface coating. In some applications the substance to be detected does not bind chemically to the electrode, but nevertheless interacts with the electrode (with or without coating), such that the oscillating properties of the resonator

25

30

changes. Irrespective of how the substance to be detected interacts with the electrode, the detection or measuring operation results in a change in the associated mass of the electrode (i.e. a change in the mass that oscillates together with the crystal). Such a change in associated mass leads to an alteration of oscillating characteristics, e.g. the resonance frequency and/or oscillation amplitude of the resonator. Hereinafter the word "bind" shall be interpreted in this description so as to embrace also the interaction of the substance to be detected with the electrode, where the substance does not bind chemically to the electrode, but interacts with the electrode such that the oscillating properties of the resonator changes.

10

The crystal used in the resonator is normally AT-cut and has a circular or quadratic shape with a diameter of approximately 5-10 mm. An AT-cut crystal oscillates in a shearing motion. This is advantageous in liquid and gaseous applications, since it minimizes the energy loss to the surrounding media. The electrodes are often of gold on both sides, but as mentioned above, other metals may also be used. The electrodes are very thin compared to the quartz crystal plate.

15

As a consequence of the change of associated mass of the electrode during the detecting/measuring operation, the resonance frequency of the crystal plate will either decrease or increase and hence the change of resonance frequency can be measured to detect the change of associated mass of the electrode. In some applications (e.g. for analysis of gases in vacuum), the mass resolution of a QCM sensor arrangement can be as low as  $1 \text{ pg/cm}^2$ , corresponding to less than 1 % of a monolayer of hydrogen.

20

The resonance frequency of the quartz crystal is a function of many parameters, apart from the change in associated mass, such as temperature, pressure, cut angel of the crystal, mechanical stress and thickness of the crystal. The resonance frequency is inversely proportional to the square root of the thickness of the crystal, and can be obtained by the Saurbrey equation:  $\Delta f = -2f^2 \cdot \Delta m / \rho v \cdot A$ , where f is the resonance frequency,  $\rho$  the density of quartz, v the shear wave velocity in quartz, A the electrode

25

30

area and  $\Delta m$  the sample mass. Typical resonance frequencies used in liquid applications range from 1 MHz to 50 MHz.

It is technically difficult to make a small crystal plate oscillate in a liquid application.

5 To be applicable for use in a sensor arrangement, the resonator must be able to withstand the stress exerted by clamping means by which the resonator is to be fixed in the sensing chamber of the sensor arrangement. It must also be able to withstand the load exerted by a liquid sample that is lead through the sensing chamber. The resonator must also have oscillating characteristics that enable oscillation also when clamped in  
10 the sensing chamber and the crystal plate must have a size and shape that allow clamping.

It has been found that one reason for insufficient sensitivity of the conventional resonators used for QCM sensor applications is related to the size of the sensing electrode,  
15 i.e. the electrode that is brought into contact with the sample. A high sensitivity is required for example within neuroscience and health diagnostics.

One parameter that affects the choice of electrode size to be chosen is the desired amount of active sites on the electrode surface. The number of active sites refers to the  
20 number of possible positions on the surface to which an analyte can bind. In the case of a study of protein adsorption on an uncoated metal surface the number of active sites is governed only by the area of the metal surface and the size of the protein. For a study of antigen-antibody interactions on a coated metal surface, the number of active sites is dependent on the number of antigens that can be immobilised on the surface. The  
25 number of active sites available on the sensor surface in turn determines the sensitivity range of the sensor arrangement.

The Q-value of the resonator is also an important parameter that has to be taken into account. The Q-value is a measure of the amount of energy stored in the system in relation to the amount of energy lost due to oscillation. This means that with a resonator  
30

with a high Q-value, little energy will have to be supplied to the crystal to ensure oscillation and the crystal is consequently easier to oscillate. Furthermore, a crystal with a high Q-value will provide a high signal to noise ratio when the frequency is measured. A high Q-value can be achieved by having a large electrode area. When the electrode area becomes smaller the Q-value decreases until the crystal can not oscillate any more. The size of the electrode area must thus also be chosen with careful consideration of the Q-value.

The attachment of the crystal into the flow system also affects the load of the crystal, since the attachment may cause a damping on the crystal. The crystal load also depends on with what type (if any) media the electrode is coated with (e.g. antibodies, Molecular Imprinted Polymers) and which type of fluid the sample and the base flow are (air, aqueous, oil etc). An increased load on the crystal, which may be due to surface coating, clamping or fluid viscosity, lowers the Q-value of the crystal in operation and may require a larger electrode area to maintain the oscillation.

The size of alteration of the resonance frequency is dependent on the size of alteration of the associated mass. It has now been found that a smaller electrode area result in a higher sensitivity, since the alteration in resonance frequency is dependent on the alteration in the mass of the electrode, which is caused by the interaction between the electrode and the substances to be detected/measured. A certain change in associated mass in absolute measures constitutes a larger relative change to the total associated mass if the electrode area is smaller, whereby the relative change in the electrode weight will be a larger for a smaller electrode area. This will in turn lead to a larger change in the oscillation frequency. The area of the electrode must, however, be chosen with consideration to the amount of active sites needed, to the Q-value and to the load of the crystal. It has been found that the sensing electrode should have a surface area of between 0,05 and 15 mm<sup>2</sup>, preferably 1-5 mm<sup>2</sup> in order to obtain a satisfying sensitivity in sensing applications for detection or measuring of analytes in liquid or gaseous media.

The piezoelectric resonator of the present invention, shown in Fig 2, comprises a quartz crystal plate 7 having a first crystal surface 8 and a second crystal surface 9. The first crystal surface is provided with a first electrode 10, the sensing electrode, which  
5 has a surface area of less than  $15 \text{ mm}^2$ , preferably less than  $10 \text{ mm}^2$ . The second crystal surface 9 is provided with a second electrode 11, the counter electrode. The sensing electrode 10 should preferably have a surface area of at least  $0.05 \text{ mm}^2$ , and should most preferably be between 1 and  $5 \text{ mm}^2$ .

10 The counter electrode 11 on the second crystal surface should preferably completely cover at least the sensing electrode area on the first crystal surface 8. However, the counter electrode should preferably be larger than the sensing electrode to assure that the complete sensing electrode area is active. This is also advantageous for manufacturing reasons, since it allows the electrodes to be slightly displaced in relation to each  
15 other, and hence the manufacture needs not to be very accurate.

Another parameter that affects the sensitivity of a QCM sensor arrangement has been found to be the flow characteristics of the fluid sample in the flow cell. Flow disturbances in the sample flow that occur in the sensing chamber as the sample passes by  
20 the sensing electrode may cause a reduction of the sensitivity. In a QCM sensor arrangement having a flow-through-cell, the sample is usually supplied to the sensing chamber from one side of the resonator crystal or from above. In the case the sample enters the chamber from the side, it leaves at the opposite side of the crystal and thus flows parallelly over the electrode surface. In the case the sample enters from above,  
25 (perpendicularly or at an angle), the sample may leave the chamber parallelly to the electrode surface or upwards at an angle.

In the hitherto known flow-through-cell QCM sensors the width of the sensing chamber is very large in comparison to the width of the sample flow channels through which  
30 the sample is supplied to the sensing chamber. As the sample flow is lead through the

sensing chamber it thus expands over the electrode surface and as a result undefined flow characteristics are caused. The change in flow conditions may include decreased flow velocity, increased turbulence, pressure variation and mixing. These circumstances lead to dispersion and dilution of the sample plug, which in turn leads to a less distinct frequency change. In many applications, e.g. in detection applications and kinetics measurements it is very important to have a low sample dispersion in the sensing chamber of the QCM sensor arrangement. Another drawback with a large sensing chamber is that pressure variations may occur over the electrode surface, with an increased noise level in the frequency signal as a result.

A further object of one preferred embodiment of the present invention is therefore to find a resonator which, when used in a flow cell provides improved flow characteristics. This preferred embodiment involves a resonator that has an electrode, the geometry, which is adjusted so as to fit to the flow channels of the QCM sensor arrangement. The electrode is then shaped such that the edge of the electrode facing the sample inlet is equal or slightly smaller than the width of the sample inlet. This is advantageous for electrodes of all sizes. In the case of a circular electrode (as shown in Figs 3a and 3b), the diameter should be slightly smaller than the diameter of the sample inlet. A resonator having a dimension that allows the flow cell to have a cross sectional area similar to that of the inlet and outlet, greatly improves the flow characteristics of the sensor arrangement. In turn, this will reduce the dispersion and increase the sensitivity of the sensor arrangement.

Figures 3a and 3b show oblique views of the piezoelectric resonator shown in Fig. 2. In Fig. 3a the resonator is seen from the sensing side, i.e. the side that is intended to be in contact with the sample. In Fig. 3b the resonator is seen from the counter electrode side. The crystal plate 7 of the resonator is provided with a small circular electrode 10, i.e. sensing electrode on its first side 8. The resonator is provided with a counter electrode 11 on the second side 9 as shown in Figure 3b. Both electrodes 10, 11 preferably

have contacting areas 12, 13 for connection with electrical contacts in the QCM sensor arrangement.

An even more preferred geometry of the sensing electrode surface is, however a rectangle or a square. Fig. 4 shows a resonator, which includes a crystal plate 107 that is provided with a rectangular electrode 110 on its first side 108 (sensing side). When a resonator as the one shown in Fig 4. is mounted in a flow cell, the electrode 110 will have a straight edge 14 directed towards the sample inlet of a flow cell and the incoming sample plug. The flow pattern of the sample plug of a sample that is injected into and transported by the base flow unavoidably gain a parabolic shape, since the flow velocity close to the walls of a flow channel is always lower than the velocity in the middle of the channel. A straight electrode edge 14, which is perpendicular to the flow direction will result in a more immediate sensor response, resulting in a yet more distinct frequency change, since the whole width of the electrode immediately and simultaneously comes into contact with the sample plug. In addition, all parallel flow fractions of the sample will interact with the sensor electrode for an equal period of time, since each parallel flow fraction will pass the same electrode length on its way through the sensing chamber. When a rectangular shape is used for the electrode (as in Fig. 4), the rectangle is defined as having a first side 15 and a second side 16 perpendicular to said first side. The rectangle naturally has two pairs of parallel sides. For the simplicity of this description only one side of each pair is discussed, i.e. only the first side 15 and the second side 16, which belong to different pairs of sides. These first and second sides may be any one of the sides in such a pair. When the resonator is mounted in a flow cell the first side 15 will be directed towards the sample inlet, perpendicularly to the flow direction, and the second side 16 will extend parallelly to the flow direction of the sample. The proportion between the first side 15 and the second side 16 is preferably that the length of one of the sides is 0,1-10 times the length of the other side. The first side may thus be shorter than the second side (as in the example shown in Fig. 4) so that the sample passes the electrode lengthwise, but the first side 15 may alternatively be longer than the second side 16, whereby the sample passes the electrode

crosswise. In the example shown in Fig 4, the second side is 4,3 times the first side. A rectangular or square electrode is advantageous for all electrodes regardless of their size.

5 As shown in Figs. 3a, 3b and 4, the first crystal surface 8, 108 is provided with a first contacting area 12, 112 connected to the first electrode 10, 110, (sensing electrode), and the second crystal surface 9 is provided with a second contacting area 13 connected to the second electrode 11 (counter electrode). The contacting areas can easily be connected to electrical contacts in the QCM sensor arrangement, whereby changes  
10 in the oscillating frequency, and thus the mass changes on the sensing electrode, can be registered. In the embodiment shown in Fig. 4 the first contacting area 12, 112 is connected to the second side 16 of the first electrode 110, i.e. to one of the sides that are parallel to the flow direction of the sample flow. Thereby the contacting area will not disturb the sample flow in the flow cell, since it will be situated outside the sensing  
15 chamber.

In some embodiments (as in the ones in Figs 2, 3a, 3b and 4) the quartz crystal 7, 107 used for the resonator has flat surfaces. Flat crystals are, due to their simple shape, easier to manufacture than other crystals and are therefore cheaper.

20

In another embodiment (shown in Fig. 5), the quartz crystal 207 that is used for the resonator is an inverted mesa, i.e. the crystal has a thin central region 17, which is encircled by a thicker peripheral region 18. An inverted mesa can thus withstand the fixation in a flow cell very well, and has at the same time excellent oscillating characteristics due to the low material thickness in the thin central region. The electrodes 210, 211 are situated in the thin central region 17. The inverted mesa may have recesses on both sides or on one side. The recesses have a flat bottom and the walls are sloping or straight. The thin central region 17 of the inverted mesa is thus constituted of the flat bottom of the recess/recesses. Fig. 5 shows an inverted mesa having recesses 19, 20 on  
25 both sides. A first electrode 210 is provided in the first recess 19 on the first crystal  
30

surface 208 and the second electrode 211 is provided in the second recess 20 on the second crystal surface 209. Both recesses have a flat bottom surface 21, 22 and sloping walls 23, 24. The inverted mesa structure is used to obtain a thinner crystal with higher resonance frequency and consequently higher sensitivity. The mechanical stability of the crystal is also guaranteed by the inverted mesa structure, since the peripheral region 18 of the crystal has a higher mechanical strength than the thin central region 17.

The surface area of the flat bottom 21 of the first recess 19, in which the sensing electrode 210 (first electrode) is provided, is larger than the surface area of the electrode 210. The electrode 210 is arranged in the recess 19 such that the part of the bottom surface that is not covered by the electrode surrounds the electrode. There will thus be a distance from the electrode edge 25 to the wall 23 of the recess all around the electrode. The shortest distance from the electrode edge to the recess walls should be at least 0.01 mm. This distance ensures that dampening of the crystal oscillation is avoided.

The present invention also relates to a flow cell for use in an arrangement for detecting or measuring an analyte in a medium. Fig 6 shows a cross sectional view of such a flow cell. The flow cell comprises walls, which form a sensing chamber 26, inlet and outlet openings 27, 28 for leading a fluid through the sensing chamber and past a resonator 29 of any embodiment as described above. The resonator 29 is arranged in the flow cell such that it constitutes one of the walls of the sensing chamber 26 and is positioned such that the first (sensing) electrode 310 is situated inside the chamber. The resonator may be engaged in the flow cell by any suitable means, such as clamping screws, pressing or adhesive. The flow cell may be an integrated constructional part of a sensor arrangement or may be a separate detachable part that can be inserted into a sensor arrangement.

The cross sectional area of the sensing chamber perpendicular to the flow direction is less than 2.5 times the cross sectional area of the inlet and outlet openings 27, 28,

whereby the flow characteristics in the flow cell are improved. Most preferably the cross sectional area is the same as the cross sectional area of the inlet and outlet openings, such that the sample flow is not affected at all by the passage through the sensing chamber. The characteristic flow channel dimension, i.e. the diameter, in the case of a circular pipe, of the inlet and outlet is preferably 0.75 mm or less. This results in a low dispersion of the sample, which in turn leads to more distinct frequency changes.

The walls 30, 31 of the flow cell that are not constituted of the resonator 29 may be assembled of different parts. However, in a preferred embodiment (shown in Fig 7) the flow cell comprises a flow cell element 32 that includes an outwardly open recess 33. The recess has a bottom surface 34 and walls 35, whereby said bottom and walls constitute the walls of the sensing chamber that are not provided by the resonator 29. In this embodiment the resonator is a replaceable part, which is held against the flow cell element by a pressing force so as to cover the recess and thus forming one wall of the flow cell. As an alternative the resonator may be attached to the flow cell element by an adhesive. In that case the whole flow cell is a replaceable part. The flow cell element comprises a contact surface 36, against which the resonator is to be held. The contact surface 36 is plane-parallel to the bottom 34 of the recess 33 and encircles the recess. In order to improve the flow characteristics the recess has a geometrical shape that corresponds to the geometry of the sensing electrode 410. The shortest distance from the electrode edge 425 to the recess walls 35 is preferably at least 0.01 mm, thereby assuring the free oscillation of the electrode 410. If the resonator is an inverted mesa the resonator 29 may preferably be arranged in the flow cell such that the flat contact surface 36 abuts against the thick peripheral region 18 of the resonator. In some applications it may be suitable to let the contact surface 36 abut against the bottom 21 of the resonator.

A flow cell element for use together with an inverted mesa resonator may alternatively have the same shape as the flow cell element 32, as described above, but without the recess. The flow cell element will thus have a flat surface that is intended for abutment

against the thick peripheral region 18 of the resonator and has inlet end outlet openings for the sample. The flat flow cell element surface, the flat bottom 21 and the walls 24 of the resonator will then constitute the sensing chamber 26.

- 5 The present invention also relates to a sensor arrangement for detecting or measuring an analyte in a medium, which comprises a flow cell as the one described above. The flow cell used thus includes a resonator of the present invention.

The resonator of the present invention can be used in QCM sensor arrangement for  
10 analysis of the viscosity of a liquid sample and are particularly suitable for studying chemical and biochemical interactions. If a piezoelectric sensor is to be used for the latter purpose, the electrode that is to be exposed to the sample is provided with a specific surface coating, which will interact with the sample. Such surface coated piezoelectric sensors can be used within for example surface science, biotechnology research  
15 and pharmaceuticals development. Other applications can be as sensor for detection of hazardous gases or substances such as environmental contaminants, biochemical warfare agents and illicit drugs, e.g. narcotic substances or performance improving drugs (doping). A third area for application of the technology is health diagnostics, where the sensor can be used for examining patients for different diseases by analysis of human  
20 blood or other body fluids.

2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30

## Claims

1. A piezoelectric resonator for use in a sensor arrangement for detecting or measuring an analyte in a medium, said resonator comprising a quartz crystal plate (7, 107, 207) having a first crystal surface (8, 108, 208) and a second crystal surface (9, 209), said first crystal surface being provided with a first electrode (10, 110, 210) and said second crystal surface being provided with a second electrode (11, 211), **characterised in that** the first electrode has a surface area of less than  $15 \text{ mm}^2$ .
2. The resonator of claim 1, wherein the surface area of the first electrode is less than  $10 \text{ mm}^2$ .
3. The resonator of claims 1 or 2, wherein the surface area of the first electrode is at least  $0.05 \text{ mm}^2$ , preferably  $1\text{-}5 \text{ mm}^2$ .
4. The resonator of any one of claims 1-3, wherein the first electrode (110) has a surface that has the shape of a rectangle, having a first side (15) and a second side (16).
5. The resonator of any one of claims 1-4, wherein the first side is at least 0,1-10 times the second side.
6. The resonator of any one of claims 1-5, wherein the first crystal surface (8, 108, 208) is provided with a first contacting area (12, 112, 212) connected to the first electrode (10, 110, 210) and the second crystal surface (9, 209) is provided with a second contacting area (13) connected to the second electrode (11, 211, 311).
7. The resonator of claim 6, wherein the first contacting area (12, 112, 212) is connected to the second side (16) of the first electrode.

8. The resonator of any one of claims 1-7, wherein the first and second surfaces (8, 108; 9) of the quartz crystal (7, 107) are flat.

9. The resonator of any one of claims 1-7, wherein the quartz crystal (207) has a thin  
5 central region in which the first electrode (210) is provided.

10. The resonator of claim 9, wherein the first side of the crystal (207) has at least a first recess (19) in which the first electrode (210) is provided, said first recess (19) having a wall (24) and a bottom surface (21) and the area of the bottom surface being  
10 larger than the first electrode (210) and wherein the first electrode is arranged in the recess such that there is a distance between the electrode edges (25) and the recess walls (24).

11. The resonator of claim 9, wherein the shortest distance from the electrode edge  
15 (25) to the recess walls (24) is at least 0.01 mm.

12. A piezoelectric resonator for use in a sensor arrangement for detecting or measuring an analyte in a medium, said resonator comprising a quartz crystal plate (107, 207) having a first crystal surface (108, 208) and a second crystal surface (209), said first  
20 crystal surface being provided with a first electrode (110, 210) and said second crystal surface being provided with a second electrode (211), characterised in that the first electrode (110, 210) has a surface that has the shape of a rectangle.

13. The resonator of claim 12, wherein the rectangle has a first side (15) and a second  
25 side (16) and the first side is at least 0,1-10 times the second side.

14. A flow cell for use in an apparatus for detecting or measuring an analyte in a medium, comprising walls forming a sensing chamber (26) together with a resonator (29) according to any one of claims 1-13, and inlet and outlet openings (27, 28) for leading  
30 a fluid through the sensing chamber, characterised in that a part of the resonator (29)

constitutes one of the walls of the sensing chamber and is arranged such that the first electrode (310, 410) is situated inside the sensing chamber.

15 The flow cell of claim 14, wherein the cross sectional area of the sensing chamber perpendicular to the flow direction is less than 2,5 times the cross sectional area of the inlet and outlet openings.

16. The flow cell of claim 15, wherein the cross sectional area is the same as the cross sectional area of the inlet and outlet openings.

10

17. The flow cell of any one of claims 14-16, wherein flow cell comprises a flow cell element (32) that includes an outwardly open recess (33), having a bottom surface (34) and walls (35), whereby said bottom and walls constitute the walls of the sensing chamber not provided by the resonator (29), and wherein the resonator is a replaceable  
15 part, which is held against the flow cell element by a pressing force so as to cover the recess and thus form the flow cell.

20

18. The flow cell of any one of claims 14-16, wherein flow cell comprises a flow cell element (32) that includes an outwardly open recess (33), having a bottom surface (34) and walls (35), whereby said bottom and walls constitute the walls of the sensing chamber not provided by the resonator (29), and wherein the resonator is attached to the flow cell element by an adhesive so as to cover the recess and thus form the flow cell.

25


19. The flow cell of claim 17 or 18, wherein the flow cell element comprises a contact surface (36), against which the resonator is to be held, which is plane-parallel to the bottom (34) of the recess (33) and which encircles the recess, and wherein the recess has a geometrical shape that corresponds to the geometry of the first electrode (410).

21. A sensor arrangement for detecting or measuring an analyte in a medium, charac-  
5 terised in that it comprises a flow cell according to any one of claims 14-19.


### Abstract

- The invention relates to a piezoelectric resonator for use in a sensor arrangement for detecting or measuring an analyte in a medium. The resonator comprises a quartz
- 5 crystal plate, having a first crystal surface and a second crystal surface. The first crystal surface is provided with a first electrode, which has a surface area of less than  $15 \text{ mm}^2$  and the second crystal surface is provided with a second electrode. The first electrode may have a rectangular surface shape.
- 10 The invention relates to a flow cell for use in an apparatus for detecting or measuring an analyte in a medium, and to such an apparatus. The flow cell comprises walls that form a sensing chamber together with the resonator, and inlet and outlet openings for leading a fluid through the sensing chamber. A part of the resonator constitutes one of the walls of the sensing chamber and is arranged such that the first electrode is situated
- 15 inside the sensing chamber.

Fig. 2

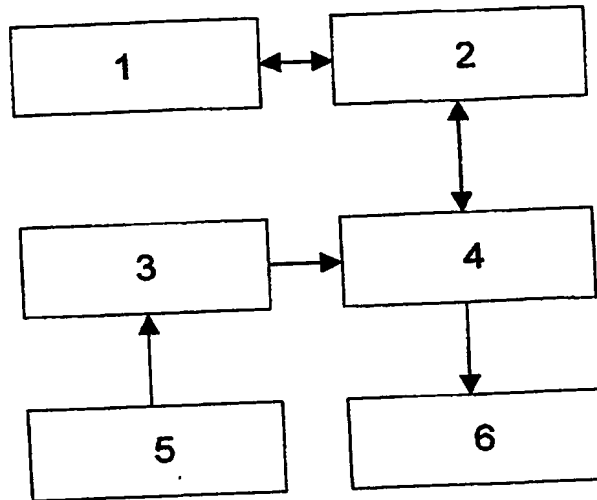

**Fig. 1**

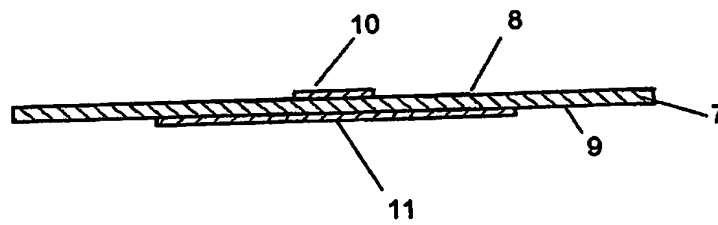

**Fig. 2**

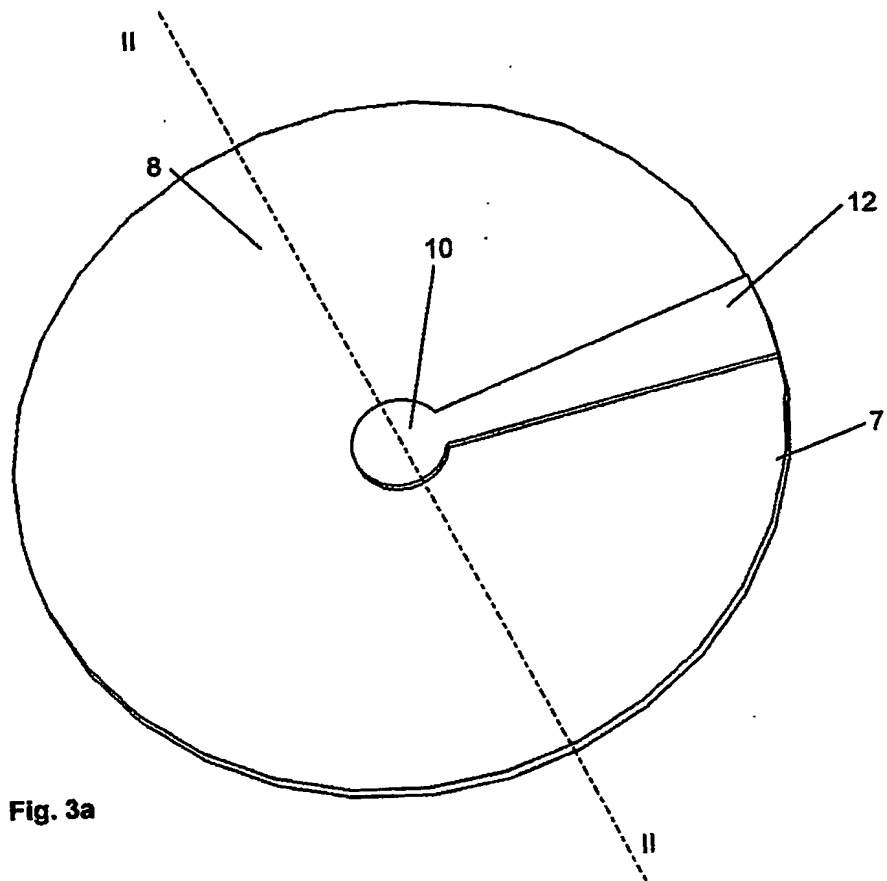


Fig. 3a

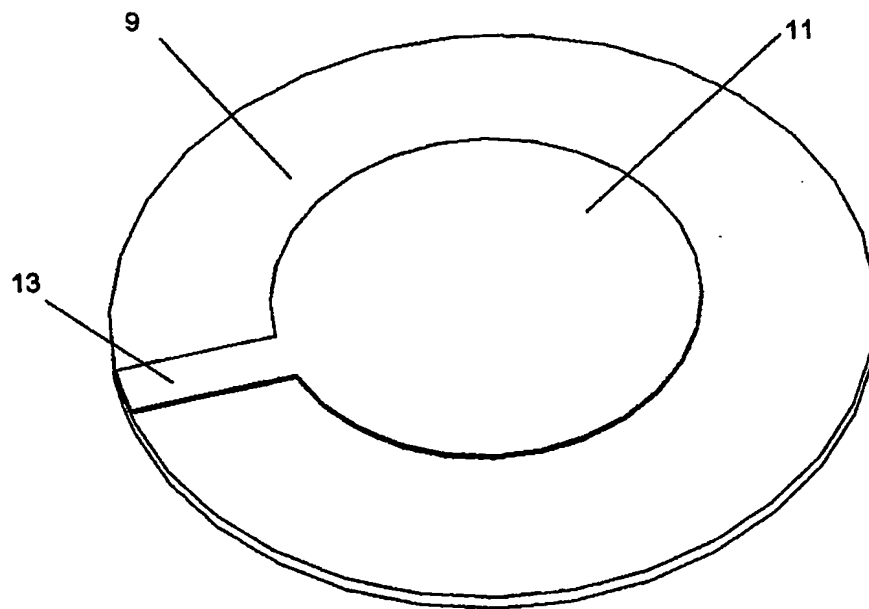


Fig. 3b

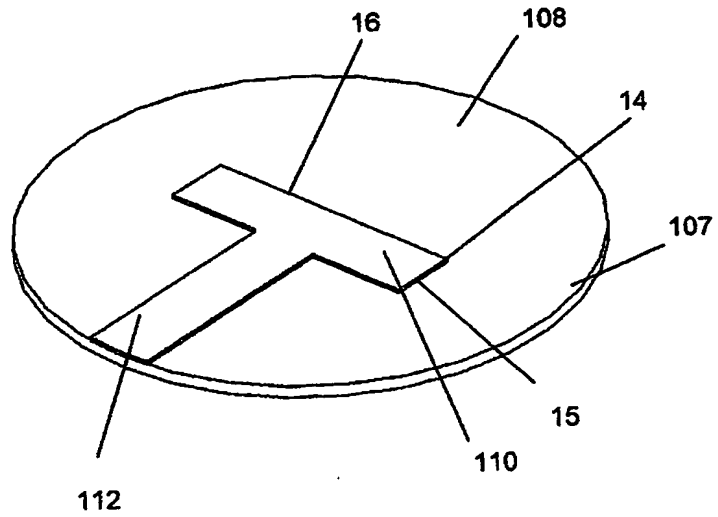


Fig. 4

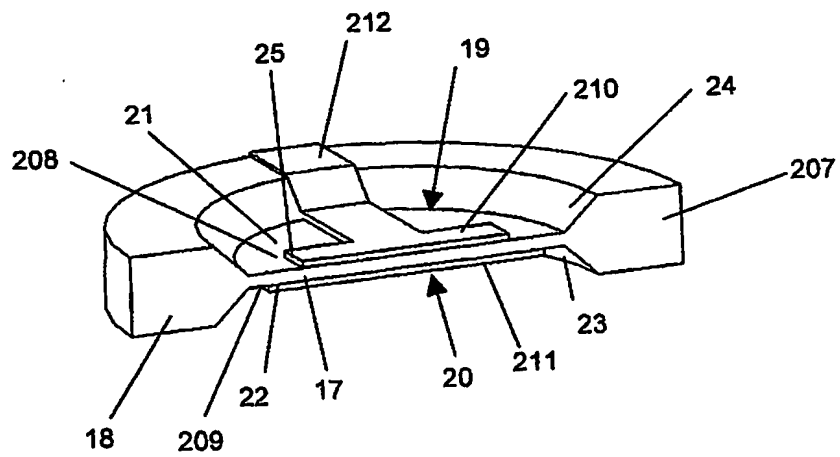


Fig. 5



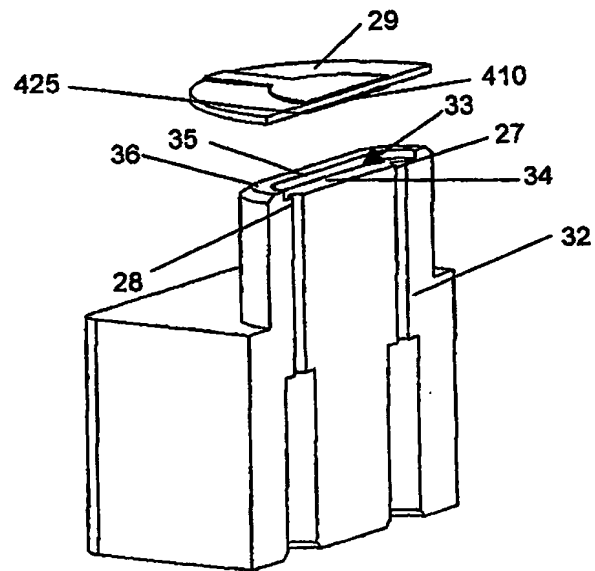


Fig. 7

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**